



HP recommends
Windows Vista® Business

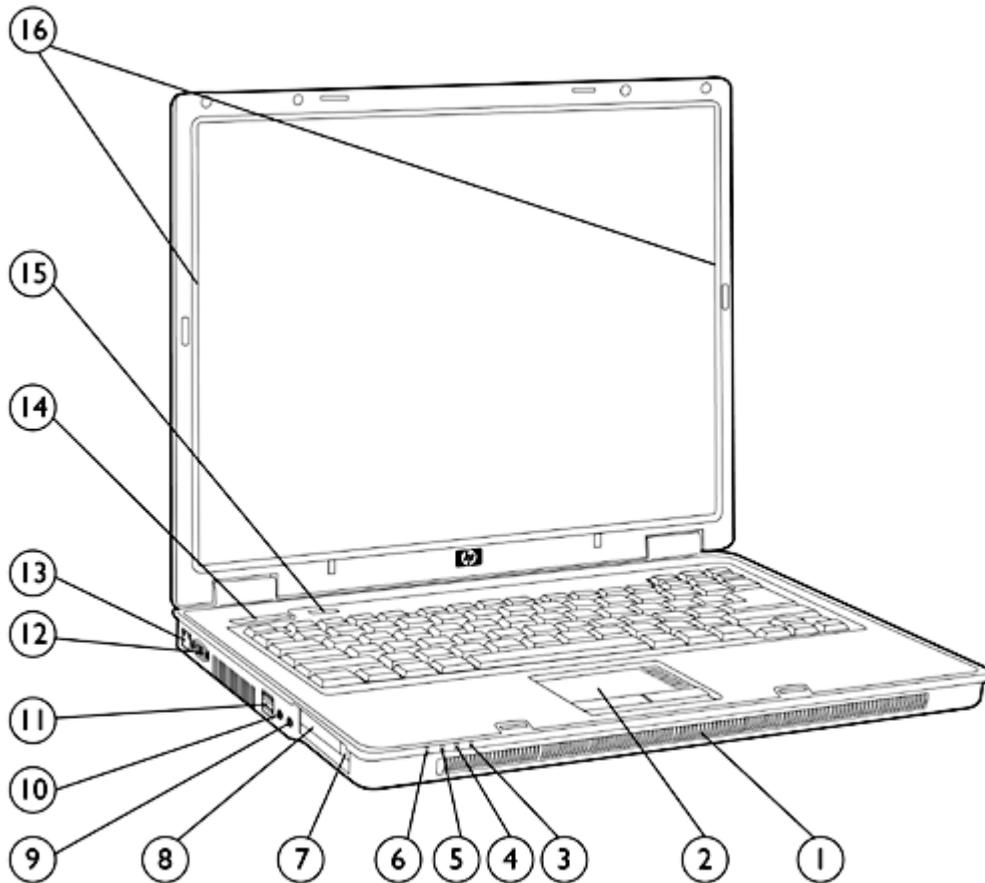

- | | |
|------------------------------|-------------------------------------|
| 1. Stereo Speakers | 9. Microphone Jack |
| 2. Touchpad with Scroll Zone | 10. Headphone Jack |
| 3. Hard Drive Activity LED | 11. 2 USB 2.0 Ports |
| 4. Battery Charging LED | 12. VGA/External Monitor Connector |
| 5. Power/Standby LED | 13. RJ-45 Port (NIC) |
| 6. Wireless On/Off LED | 14. Power Button with LED |
| 7. PC Card Eject Button | 15. Wireless On/Off Button with LED |
| 8. PC Card Slot | 16. Dual-band Wireless LAN Antennas |

Overview

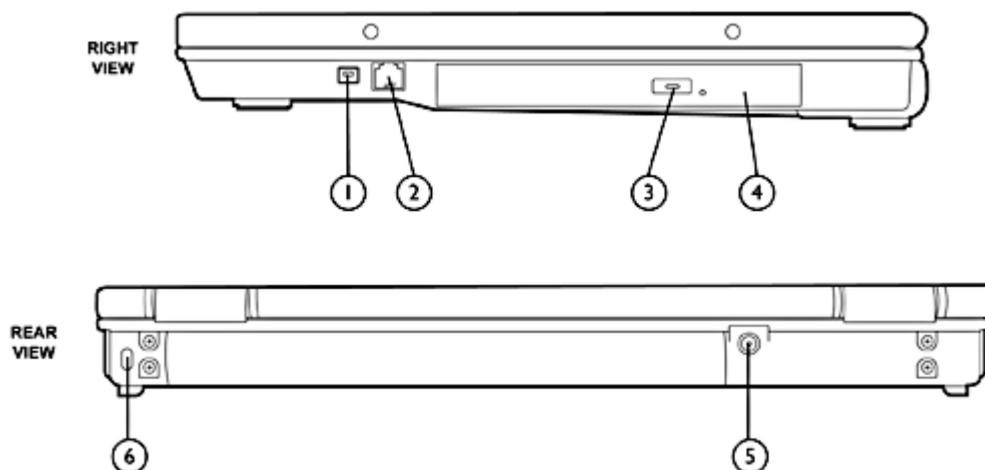

- | | |
|-------------------------|-------------------------|
| 1. IEEE 1394a Port | 4. Optical Drive |
| 2. RJ-11 Port (Modem) | 5. DC Power Connector |
| 3. Optical Drive Button | 6. Kensington Lock Slot |

At A Glance

- Genuine Windows Vista Business 32, Genuine Windows Vista Home Basic 32, Genuine Windows XP Professional, Genuine Windows XP Home Edition, or FreeDOS
- Intel® Core™ Duo Processors T2300 to T2600*, Intel Core Solo Processor T1300*
Intel Celeron M Processors 410 to 430*
- Sleek industrial design starting at 6.1 lb/2.77 kg and 1.2-inch/30.3 mm thin at front
- Mobile Intel 945GM Express Chipset or Mobile Intel 940GML Express Chipset
- Supports up to 4GB of 533- or 667-MHz DDR2 SDRAM, dual channel memory support*
- Up to 120-GB SATA 5400 rpm, user-removable hard drive
- Intel Graphics Media Accelerator 950 with up to 128 MB shared system memory
- Optional integrated 802.11 a/b/g or 802.11 b/g wireless LAN module and Bluetooth®
- Broadcom 10/100 Ethernet PCI Controller
- Touchpad with scroll zone
- Protected by one-year standard parts and labor warranty – certain restrictions and exclusions apply

* Memory greater than 2 GB requires Mobile Intel 945GM Express Chipset. Above 3-GB, all memory may not be available due to system resource requirements. 667-MHz memory is supported at a maximum speed of 533 MHz by the 940GML Express Chipset.

Standard Features

Processors

Intel Core Duo Processor T2600* (2.16-GHz, 667-MHz FSB, 2-MB L2 cache)
Intel Core Duo Processor T2500* (2.00-GHz, 667-MHz FSB, 2-MB L2 cache)
Intel Core Duo Processor T2400* (1.83-GHz, 667-MHz FSB, 2-MB L2 cache)
Intel Core Duo Processor T2300* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)
Intel Core Duo Processor T2300E* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)
Intel Core Solo Processor T1300* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)
Intel Celeron M Processor 430* (1.73-GHz, 533-MHz FSB, 1-MB L2 cache)
Intel Celeron M Processor 420* (1.60-GHz, 533-MHz FSB, 1-MB L2 cache)
Intel Celeron M Processor 410* (1.46-GHz, 533-MHz FSB, 1-MB L2 cache)

* Intel's numbering is not a measurement of higher performance. Intel Core Duo and Core Solo processors available with Intel 945GM Express Chipset only.

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

Operating System

Preinstalled

Genuine Windows Vista Business 32*
Genuine Windows Vista Home Basic 32*
Genuine Windows XP Professional SP2
Genuine Windows XP Home Edition SP2
FreeDOS

Supported

(select drivers available on
<http://www.hp.com>)

Genuine Windows Vista Business 64*†
Genuine Windows Vista Enterprise*†
Genuine Windows 2000

Certified

SUSE Linux Enterprise Desktop 10

* Certain Windows Vista product features require advanced or additional hardware.

See <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit <http://www.windowsvista.com/upgradeadvisor>.

† At initial boot, either 32- or 64-bit can be selected. This is a one time selection and the other version will be deleted. The 64-bit version is for Intel Core 2 Duo models only.

Chipset

Mobile Intel 945GM Express Chipset with 667-MHz front side bus
or
Mobile Intel 940GML Express Chipset with 533-MHz front side bus

Graphics

Intel Graphics Media Accelerator 950 with up to 224-MB shared system memory
Microsoft DirectX 9 capable

Standard Features

Display	Internal	15.0-inch XGA (1024 x 768 resolution) 15.0-inch XGA BrightView (1024 x 768 resolution) 15.0-inch SXGA+ wide viewing angle (1400 x 1050 resolution)
	External	Up to 32-bit per pixel color depth VGA port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.
<hr/>		
Memory	Standard	256-MB, 512-MB, 1024-MB or 2048-MB 533-MHz or 667-MHz* DDR2 SDRAM; two SODIMM slots supporting dual channel memory
	Maximum	Intel 945GM Express Chipset supports up to 4096-MB maximum (2048-MB 533- or 667-MHz SODIMM in slots 1 and 2) Intel 940GML Express Chipset supports up to 2048-MB maximum (1024-MB 533- or 667-MHz SODIMM in slots 1 and 2)
	Dual-channel	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.
<p>* 667-MHz memory is supported at a maximum speed of 533 MHz by the Mobile Intel 940GML Express Chipset.</p> <p>NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Above 3-GB, all memory may not be available due to system resource requirements.</p>		
<hr/>		
Communications		Integrated Broadcom 10/100 Ethernet PCI Controller 56K V.92 modem* with digital line guard * Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.
<hr/>		
Wireless Devices		Support for a broad range of secure, integrated wireless LAN options featuring support for the latest industry standards. Integrated Bluetooth is also an option (factory configurable only) and can be combined with any of the supported wireless LAN options.
	All integrated wireless LAN options	Wi-Fi certified Cisco Compatible Extensions support (Version 3.0) Wired Equivalent Privacy (WEP) support up to 128-bit keys Wi-Fi Protected Access (WPA) and WPA2 support 802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP Advanced Encryption Standard (AES) support WiFi certified for WPA2, WMM Dual antennas integrated in the display enclosure
	Intel PRO/Wireless 3945ABG Network Connection	Intel Centrino mobile technology Integrated support for 802.11a, b and g Up to 54-mbps data rate
	Broadcom 4311AG WiFi Adapter	Integrated support for 802.11a, b and g Up to 54-mbps data rate

Standard Features

Broadcom 4311BG WiFi Adapter	Integrated support for 802.11 b and g Up to 54-mbps data rate
HP Integrated Module with Bluetooth 2.0 Wireless Technology	Bluetooth Specification v2.0 compliant Works with a wide range of Bluetooth devices

Keyboard	The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. US and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19-mm x 19-mm key pitch (center-to-center spacing), 2.5-mm stroke, comfort-dished keycaps, and bright key legends for improved visibility in low light conditions.
-----------------	---

One-Touch Productivity Buttons	Provides one-touch access to control Wireless On/Off, with LED indicator
---------------------------------------	--

Pointing Device	Touchpad with scroll zone, two soft-touch pick buttons
------------------------	--

Expansion Card Slots	One Type I/II PC Card slot	Supports 32-bit CardBus and 16-bit PC Cards
-----------------------------	-----------------------------------	---

Storage	Hard Drives	40-, 60-, 80-, 100-GB 5400 rpm SMART SATA
	HP Mobile Data Protection System	Hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive and protecting it during normal use from shock and vibration.
	Fixed Optical Drives	DVD/CD-RW Combo DVD+/-RW SuperMulti with Double Layer LightScribe DVD+/-RW with Double Layer

Interfaces	PC Card Slot	One Type I/II
	External Monitor	One – VGA
	IEEE 1394a Port	One
	External Microphone	One
	Headphone/Line out	One
	Power Connector	One
	RJ-11 (Modem)	One
	RJ-45 (NIC)	One
	USB 2.0	Two
	Extended Life Battery Connector	One
LED Status Indicators	Ten	

Standard Features

Audio	ADI High Definition CODEC Integrated 16-bit Sound Blaster Pro compatible audio Integrated stereo speakers Stereo headphone/line out Stereo microphone in				
Software	<table><tr><td>Preinstalled Software with Windows Vista or Windows XP</td><td>Adobe Acrobat Reader HP Backup and Recovery Manager HP Help and Support Center HP Mobile Print Driver (Windows XP models) HP ProtectTools Security Manager: BIOS Configuration for HP ProtectTools Credential Manager for HP ProtectTools HP Quick Launch Buttons HP Wireless Assistant Sonic Digital Media Plus (Windows XP models): RecordNow! (for optional DVD+/-RW and DVD/CDRW drives) MyDVD (DVD Authoring for optional DVD+/-RW drives) Roxio Creator 9 (Windows Vista models with optional DVD+/-RW or DVD/CDRW drives) Synaptics Touchpad Driver Symantec Norton Internet Security with complimentary 60-day live update InterVideo WinDVD – DVD Player (for optional DVD+/-RW, DVD/CDRW and DVD drives)</td></tr><tr><td>Additional software available from the Web</td><td>Smart Card Security for HP ProtectTools Device Access Manager for HP ProtectTools</td></tr></table>	Preinstalled Software with Windows Vista or Windows XP	Adobe Acrobat Reader HP Backup and Recovery Manager HP Help and Support Center HP Mobile Print Driver (Windows XP models) HP ProtectTools Security Manager: BIOS Configuration for HP ProtectTools Credential Manager for HP ProtectTools HP Quick Launch Buttons HP Wireless Assistant Sonic Digital Media Plus (Windows XP models): RecordNow! (for optional DVD+/-RW and DVD/CDRW drives) MyDVD (DVD Authoring for optional DVD+/-RW drives) Roxio Creator 9 (Windows Vista models with optional DVD+/-RW or DVD/CDRW drives) Synaptics Touchpad Driver Symantec Norton Internet Security with complimentary 60-day live update InterVideo WinDVD – DVD Player (for optional DVD+/-RW, DVD/CDRW and DVD drives)	Additional software available from the Web	Smart Card Security for HP ProtectTools Device Access Manager for HP ProtectTools
Preinstalled Software with Windows Vista or Windows XP	Adobe Acrobat Reader HP Backup and Recovery Manager HP Help and Support Center HP Mobile Print Driver (Windows XP models) HP ProtectTools Security Manager: BIOS Configuration for HP ProtectTools Credential Manager for HP ProtectTools HP Quick Launch Buttons HP Wireless Assistant Sonic Digital Media Plus (Windows XP models): RecordNow! (for optional DVD+/-RW and DVD/CDRW drives) MyDVD (DVD Authoring for optional DVD+/-RW drives) Roxio Creator 9 (Windows Vista models with optional DVD+/-RW or DVD/CDRW drives) Synaptics Touchpad Driver Symantec Norton Internet Security with complimentary 60-day live update InterVideo WinDVD – DVD Player (for optional DVD+/-RW, DVD/CDRW and DVD drives)				
Additional software available from the Web	Smart Card Security for HP ProtectTools Device Access Manager for HP ProtectTools				
HP Backup and Recovery Manager	Each unit is shipped with HP Backup and Recovery Manager. HP Backup and Recovery Manager can provide data and system file protection for HP business PCs to enable fast recovery if the system becomes corrupted or if important information is accidentally deleted. HP Backup and Recovery Manager can perform scheduled or manual backups of the entire drive or individual files and folders. Up to 8 GB of the hard drive is reserved for the system recovery software. HP Backup and Recovery Manager can also create software recovery CDs or DVDs (requires optional hardware).				
SMBIOS Version 2.4	System Management BIOS, previously known as DMI BIOS, is used to store system management information.				
HP ProtectTools Security Manager	HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. Modules currently available are: <ul style="list-style-type: none">- Smart Card Security for HP ProtectTools- BIOS Configuration for HP ProtectTools- Credential Manager for HP ProtectTools- Device Access Manager for HP ProtectTools				

Standard Features

Security	Standard Features	<ul style="list-style-type: none"> HP ProtectTools Security Manager Configuration Control Hardware Memory Change Alert Ownership Tag Setup Password Power-On Password DriveLock HP Disk Sanitizer Enabled for PC Smart Card options Kensington Lock Slot Support for Computrace / LoJack for Laptops (must be purchased separately)
<p>For more information on HP security solutions refer to http://www.hp.com/go/security.</p>		

Power Supply	<p>External 65-watt Smart AC adapter, 6-foot (1.8-meter) power cord included. Total length including External AC adapter is 12 feet (3.66 meter). HP Fast Charge Technology*</p>
---------------------	--

*Fast Charge Technology recharges your battery up to 90% within 90 minutes when the system is off. Fast Charge Technology does not apply to 12-cell Ultra-Capacity batteries.

Battery	Primary Battery	<ul style="list-style-type: none"> 6-cell (52Wh) high capacity Lithium-Ion 6-cell (43Wh) high capacity Lithium-Ion
	Optional HP 8-Cell Extended Life Battery	8-cell (52Wh) high capacity Lithium-Ion
	Optional HP 12-Cell Ultra-Capacity Battery	12-cell (95Wh) high capacity Lithium-Ion

Battery Life		6-cell (52Wh) Primary	6-cell (43Wh) Primary
	Primary Battery	Up to 5 hours	Up to 4 hours and 30 minutes
	Primary Battery and optional HP 8-Cell Extended Life Battery	Up to 10 hours and 15 minutes	Up to 9 hours and 45 minutes
	Primary Battery and optional HP 12-Cell Ultra-Capacity Battery	Up to 15 hours	Up to 13 hours

NOTE: Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.

System Standby Time	Up to 1 week
----------------------------	--------------

Standard Features

Power Conservation	Supports enhanced Intel SpeedStep technology on models with Mobile Intel 945GM Express Chipset that have Intel Core Duo processors (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode) Intel Display Power Saving technology Hibernation Standby ACPI compliance
---------------------------	---

Service and Support	HP Services includes a one-year standard parts and labor warranty, pick-up or carry-in, and toll-free 7 x 24 hardware technical phone support. On-site service and warranty upgrades are also available. NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp .
----------------------------	--

Select Model(s)

nx6310 EN181UT#ABA Smart Buy	Processor	Intel Celeron M Processor 410* (1.46-GHz, 533-MHz FSB, 1-MB L2 cache)
	Operating System	Genuine Windows XP Home Edition
	System Memory	256-MB 533-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	40-GB 5400 rpm SATA
	Optical Drive	24x DVD/CD-RW Combo (Fixed)
	Display	15.0-inch XGA (1024 x 768 resolution)
	Graphics	Intel Graphics Media Accelerator 950 with up to 128-MB shared system memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom 10/100 Ethernet Controller
	Integrated Wireless	None
	TPM Embedded Security Chip	No
	Pointing Device	Touchpad with scroll zone, two soft-touch pick buttons
	Battery	6-cell high capacity Lithium-Ion (52Wh)
	Power	External 65W adapter
Warranty	1 Year Worldwide Limited Warranty	

Standard Features

nx6310 EN182UT#ABA Smart Buy	Processor	Intel Celeron M Processor 410* (1.46-GHz, 533-MHz FSB, 1-MB L2 cache)
	Operating System	Genuine Windows XP Home Edition Windows Vista Capable
	System Memory	512-MB 533-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	40-GB 5400 rpm SATA
	Optical Drive	24x DVD/CD-RW Combo (Fixed)
	Display	15.0-inch XGA (1024 x 768 resolution)
	Graphics	Intel Graphics Media Accelerator 950 with up to 128-MB shared system memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom 10/100 Ethernet Controller
	Integrated Wireless	Broadcom 4311BG 802.11b/g WiFi Adapter
	TPM Embedded Security Chip	No
	Pointing Device	Touchpad with scroll zone, two soft-touch pick buttons
	Battery	6-cell high capacity Lithium-Ion (52Wh)
	Power	External 65W adapter
Warranty	1 Year Worldwide Limited Warranty	

nx6310 EN183UA#ABA	Processor	Intel Celeron M Processor 410* (1.46-GHz, 533-MHz FSB, 1-MB L2 cache)
	Operating System	Genuine Windows XP Professional Windows Vista Capable
	System Memory	512-MB 533-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Optical Drive	24x DVD/CD-RW Combo (Fixed)
	Display	15.0-inch XGA (1024 x 768 resolution)
	Graphics	Intel Graphics Media Accelerator 950 with up to 128-MB shared system memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom 10/100 Ethernet Controller
	Integrated Wireless	Broadcom 4311BG 802.11b/g WiFi Adapter
	TPM Embedded Security Chip	No
	Pointing Device	Touchpad with scroll zone, two soft-touch pick buttons
	Battery	6-cell high capacity Lithium-Ion (52Wh)
	Power	External 65W adapter
Warranty	1 Year Worldwide Limited Warranty	

Standard Features

nx6310 EN184UT#ABA Smart Buy	Processor	Intel Core Duo Processor T2300E* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)
	Operating System	Genuine Windows XP Professional Windows Vista Capable
	System Memory	512-MB 533-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Optical Drive	24x DVD/CD-RW Combo (Fixed)
	Display	15.0-inch XGA BrightView (1024 x 768 resolution)
	Graphics	Intel Graphics Media Accelerator 950 with up to 128-MB shared system memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom 10/100 Ethernet Controller
	Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g
	TPM Embedded Security Chip	No
	Pointing Device	Touchpad with scroll zone, two soft-touch pick buttons
	Battery	6-cell high capacity Lithium-Ion (52Wh)
	Power	External 65W adapter
	Warranty	1 Year Worldwide Limited Warranty

nx6310 EN185UA#ABA	Processor	Intel Core Duo Processor T2300E* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)
	Operating System	Genuine Windows XP Professional Windows Vista Capable
	System Memory	512-MB 533-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Optical Drive	24x DVD/CD-RW Combo (Fixed)
	Display	15.0-inch XGA (1024 x 768 resolution)
	Graphics	Intel Graphics Media Accelerator 950 with up to 128-MB shared system memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom 10/100 Ethernet Controller
	Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g Integrated Bluetooth
	TPM Embedded Security Chip	No
	Pointing Device	Touchpad with scroll zone, two soft-touch pick buttons
	Battery	6-cell high capacity Lithium-Ion (52Wh)
	Power	External 65W adapter
	Warranty	1 Year Worldwide Limited Warranty

Standard Features

nx6310 PZ902UA#ABA	Processor	Intel Core Solo Processor T1300* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)
	Operating System	Genuine Windows XP Professional Edition
	System Memory	512-MB 533-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Optical Drive	24x DVD/CD-RW Combo (Fixed)
	Display	15.0-inch XGA BrightView (1024 x 768 resolution)
	Graphics	Intel Graphics Media Accelerator 950 with up to 128-MB shared system memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom 10/100 Ethernet Controller
	Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g
	TPM Embedded Security Chip	No
	Pointing Device	Touchpad with scroll zone, two soft-touch pick buttons
	Battery	6-cell high capacity Lithium-Ion (52Wh)
	Power	External 65W adapter
	Warranty	1 Year Worldwide Limited Warranty

nx6310 PZ903UA#ABA	Processor	Intel Core Solo Processor T1300* (1.66-GHz, 667-MHz FSB, 2-MB L2 cache)
	Operating System	Genuine Windows XP Professional Edition
	System Memory	512-MB 533-MHz DDR2 SDRAM (1 DIMM)
	Hard Drive	60-GB 5400 rpm SATA
	Optical Drive	24x DVD/CD-RW Combo (Fixed)
	Display	15.0-inch XGA (1024 x 768 resolution)
	Graphics	Intel Graphics Media Accelerator 950 with up to 128-MB shared system memory
	Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
	Communications	56K Fax/Modem, Broadcom 10/100 Ethernet Controller
	Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g Integrated Bluetooth
	TPM Embedded Security Chip	No
	Pointing Device	Touchpad with scroll zone, two soft-touch pick buttons
	Battery	6-cell high capacity Lithium-Ion (52Wh)
	Power	External 65W adapter
	Warranty	1 Year Worldwide Limited Warranty

Standard Features

nx6310
PZ904UA#ABA

Processor	Intel Core Duo Processor T2400* (1.83-GHz, 667-MHz FSB, 2-MB L2 cache)
Operating System	Genuine Windows XP Professional Edition
System Memory	512-MB 533-MHz DDR2 SDRAM (1 DIMM)
Hard Drive	80-GB 5400 rpm SATA
Optical Drive	DVD+/-RW SuperMulti with Double Layer (Fixed)
Display	15.0-inch SXGA+ wide viewing angle (1400 x 1050 resolution)
Graphics	Intel Graphics Media Accelerator 950 with up to 128-MB shared system memory
Audio	ADI1981HD High Definition CODEC, Line out/headphone and microphone jacks
Communications	56K Fax/Modem, Broadcom 10/100 Ethernet Controller
Integrated Wireless	Intel Pro/Wireless 802.11 a/b/g Integrated Bluetooth
TPM Embedded Security Chip	No
Pointing Device	Touchpad with scroll zone, two soft-touch pick buttons
Battery	6-cell high capacity Lithium-Ion (52Wh)
Power	External 65W adapter
Warranty	1 Year Worldwide Limited Warranty

* Intel's numbering is not a measurement of higher performance.

Options

Memory	256-MB 533-MHz DDR2 SDRAM	PE830A
	512-MB 533-MHz DDR2 SDRAM	PE831A
	1024-MB 533-MHz DDR2 SDRAM	PE832A
	512-MB 667-MHz DDR2 SDRAM*	EM993AA
	1024-MB 667-MHz DDR2 SDRAM*	EM994AA
	2048-MB 667-MHz DDR2 SDRAM*	EM995AA

* 667-MHz memory is supported at a maximum speed of 533 MHz by the Mobile Intel 940GML Express Chipset.

Other Storage	80-GB 5400 rpm Primary SATA Hard Drive	ET354AA
	HP USB Digital Drive + 256-MB Secure Digital Card	DL702AA
	HP USB Diskette Drive	DC361B
	HP 12.7mm DVD+/-RW LightScribe Drive (Available July 2006)	ET353AA

Communications	Intel PRO/Wireless 3945ABG 802.11 a/b/g WLAN option kit	EX150AA#ABA
-----------------------	---	-------------

Expansion Solutions	HP 4-port USB 2.0 Hub	DG954A
----------------------------	-----------------------	--------

Power	HP 2-bay Battery Charging Station	DT533A#ABA
	HP 10-bay Battery Charging Station	DT534A#ABA
	Battery Adapter kit #1	PK402A
	65W Smart AC Adapter	ED494AA#ABA
	90W Smart AC Adapter	ED495AA#ABA
	90W Smart Auto Adapter	ED493AA
	65W Air/Auto/AC Combo Adapter	ED993AA#ABA
	90W Aircraft Cables	DC899A
	Primary 6-cell Battery Pack	PB994A
	HP 8-cell Extended Life Battery	PB993A
HP 12-cell Ultra-Capacity Battery	EJ092AA#ABA	

Carrying Cases	HP Entry Value Case	DL617A
	HP Top Load Nylon	DC915A
	HP Executive Leather case	PA847A
	HP Sport Backpack	DG102A

Security	HP PCMCIA Smart Card Reader	DC350B
	HP/Kensington Cable Lock	PC766A

Options

Input/Output Devices	USB/PS2 Keyboard	DC852A#ABA
	USB/PS2 Optical Mouse	DC369A
	HP USB Optical Travel Mouse	F2100A

Memory

Support for up to 4096 MB* of 533- or 667-MHz** DDR2 SDRAM
 Two DIMM slots
 DIMM sizes supported: 256 MB, 512 MB, 1024 MB, and 2048 MB

Standard Memory

- 256 MB (256 MB x 1)
- 512 MB (512 MB x 1 or 256 MB x 2)
- 768 MB (512 MB + 256 MB)
- 1024 MB (1024 MB x 1 or 512 MB x 2)
- 1536 MB (1024 MB + 512 MB)
- 2048 MB (1024 MB x 2)
- 4096 MB (2048 MB x 2)

Optional Memory Upgrades

Support for up to 4096 MB* of memory is available (with the installation of optional DDR2 SDRAM memory kits). Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
768 MB	512 MB	256 MB
1024 MB	1024 MB	Empty
1024 MB	512 MB	512 MB
1280 MB	1024 MB	256 MB
1536 MB	1024 MB	512 MB
2048 MB	1024 MB	1024 MB
4096 MB*	2048 MB	2048 MB

NOTE: This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

Memory Upgrades	256-MB 533-MHz DDR2 SDRAM	PE830A
	512-MB 533-MHz DDR2 SDRAM	PE831A
	1024-MB 533-MHz DDR2 SDRAM	PE832A
	512-MB 667-MHz DDR2 SDRAM**	EM993AA
	1024-MB 667-MHz DDR2 SDRAM**	EM994AA
	2048-MB 667-MHz DDR2 SDRAM**	EM995AA

* Memory greater than 2 GB requires Mobile Intel 945GM Express Chipset. Above 3-GB, all memory may not be available due to system resource requirements.

** 667-MHz memory is supported at a maximum speed of 533 MHz by the Mobile Intel 940GML Express Chipset.

Storage

Removable Media Drive Support

	Quantity Supported	Drive Bay
LightScribe DVD+/-RW Drive with Double Layer	One	Fixed optical drive bay
DVD+/-RW SuperMulti Drive with Double Layer	One	Fixed optical drive bay
DVD/CD-RW Combo Drive	One	Fixed optical drive bay

Hard Drive Support

	Quantity Supported	Drive Bay
Primary Hard Drives		
120-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
100-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
80-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay
60-GB 5400 rpm SMART SATA Hard Drive	One	Dedicated hard drive bay

Technical Specifications

System Unit	Dimensions (HxWxD)	1.2 (at front) x 12.9 x 10.5 in (30.3 (at front) x 328.6 x 266.7 mm)
	Weight	with 15.0-inch display 6.1 lb (2.77 kg)
	NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 6-cell battery, 60-GB hard drive, 256-MB memory, and CD-ROM drive. Weight varies by configuration and components.	
	Stand-Alone Power Requirements	Normal Operating Voltage 18.5 V
		Average Operating Power 12.5 W
		Max Operating Power < 65 W
	Temperature	Operating 32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
		Non-operating -4° to 140° F (-20° to 60° C)
	Relative Humidity	Operating 10% to 90%, non-condensing
		Non-operating 5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
	Shock	Operating 125 G, 2 ms, half-sine
		Non-operating 200 G, 2 ms, half-sine
	Random Vibration	Operating 0.75 grms
		Non-operating 1.50 grms
	Altitude (unpressurized)	Operating -50 to 10,000 ft (-15.24 to 3,048 m)
		Non-operating -50 to 40,000 ft (-15.24 to 12,192 m)
	Industry Standard Certifications	UL Yes
		CSA Yes
		FCC Compliance Yes
		Energy Star Compliant Yes
		ICES Yes
		GS Yes
		Australia / NZ A-Tick Compliance Yes
		CCC Yes
		Japan VCCI Compliance Yes
		MIC Yes
		BSMI Yes
		CE Marking Compliance Yes
		BNCI or BELUS Yes
		CIT Yes
		GOST Yes
		Saudi Arabian Compliance (ICCP) Yes
		SABS Yes
		UKRSERTCOMPUTER Yes

Technical Specifications

HP 65W Smart AC Adapter	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)	
	Weight	0.62 lb (280 g)	
	Input	100 to 240 VAC	
		Input Efficiency	83% min at 115 VAC
	Output	Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC
		Output power 65W	65W
		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
		Connector	3 pin/grounded, mates with interchangeable cords
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
EMI and Safety Certifications	Storage Humidity	10% to 90%	
	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF – over 200,000 hours at 25°C ambient condition.		
	Option Kit Contents	65W AC Adapter, power cable, warranty booklet	

Optional HP 12-Cell Ultra-Capacity Battery	Dimensions (H x W x L)	1.3 x 6.0 x 10.6 in (3.33 x 15.25 x 26.88 cm)	
	Weight	1.77 lb (0.803 kg)	
	Cells/Type	12-cell Lithium-Ion	
	Energy	Voltage	14.8V
		Watt-hour Capacity	95Wh
		Amp-hour Capacity	6.45Ah
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	Smart Adapter	3 to 4 hours
		System ON	4 to 5 hours (depending on system power consumption)
Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery		

Technical Specifications

Optional HP 8-Cell Extended Life Battery	Dimensions (H x W x L)	1.0 x 3.9 x 8.7 in (2.5 x 10.0 x 22.0 cm)		
	Weight	1.00 lb (0.455 kg)		
	Cells/Type	8-cell Lithium-Ion		
	Energy	Voltage	14.4V	
		Watt-hour Capacity	52Wh	
		Amp-hour Capacity	3.6Ah	
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F (-10° to 60° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
	Battery Re-Charge Time	System in OFF mode or Standby	3 hours	
		System ON	3 to 5 hours (depending on system power consumption)	
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF	
	Fuel Gauge	When pressed, LEDs light indicating level of charge remaining on battery		

52Wh Primary 6-Cell Battery	Dimensions (H x W x L)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)		
	Weight	0.737 lb (0.335 kg)		
	Cells/Type	6-cell Lithium-Ion		
	Energy	Voltage	10.8V	
		Watt-hour Capacity	52Wh	
		Amp-hour Capacity	4.8Ah	
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F (-10° to 60° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
	Battery Re-Charge Time	System in OFF Mode or Standby	2.5 hours	
		System ON	3 to 5 hours (depending on system power consumption)	
		HP Fast Charge Technology	Charges the battery up to 90% within 1.5 hours when system is OFF	

Technical Specifications

43Wh Primary 6-Cell Battery	Dimensions (H x W x L)	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)		
	Weight	0.715 lb (0.325 kg)		
	Cells/Type	6-cell Lithium-Ion		
	Energy	Voltage	10.8V	
		Watt-hour capacity	43Wh	
		Amp-hour capacity	4.0Ah	
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F (-10° to 60° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
	Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours	
System ON		3 to 5 hours (depending on system power consumption)		
HP Fast Charge Technology		Charges the battery up to 90% within 1.5 hours when system is OFF		

15.0-Inch Color TFT SXGA+ Wide Viewing Angle Display	Active Area (W x H)	12.0 x 9.0 in (30.4 x 22.8 cm)		
	Diagonal Size	15.0 in (38.0 cm)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	300:1 (typical)		
	Refresh Rate	60 Hz		
	Brightness	170 nit (typical)		
	Pixel Resolution	Pitch	0.217 mm	
		Format	1400 x 1050	
		Configuration	RGB Stripe	
	Backlight	CCFL		
PPI	117			
Viewing Angle	±60° Horizontal, +40°/-45° Vertical (typical)			

15.0-Inch Color TFT XGA Display	Active Area (W x H)	12.0 x 9.0 in (30.4 x 22.8 cm)		
	Diagonal Size	15.0 in (38.0 cm)		
	Surface Treatment	Anti-glare		
	Contrast Ratio	300:1 (typical)		
	Refresh Rate	60 Hz		
	Brightness	150 nit (typical)		
	Pixel Resolution	Pitch	0.296 mm	
		Format	1024 x 768	
		Configuration	RGB Stripe	
	Backlight	CCFL		
PPI	86			
Viewing Angle	±45° Horizontal, ±25° Vertical (typical)			

Technical Specifications

15.0-Inch Color TFT XGA BrightView Display	Active Area (W x H)	12.0 x 9.0 in (30.4 x 22.8 cm)
	Diagonal Size	15.0 in (38.0 cm)
	Surface Treatment	BrightView
	Contrast Ratio	300:1 (typical)
	Refresh Rate	60 Hz
	Brightness	150 nit (typical)
	Pixel Resolution	Pitch 0.296 mm Format 1024 x 768 Configuration RGB Stripe
	Backlight	CCFL
	PPI	86
	Viewing Angle	±45° Horizontal, ±25° Vertical (typical)

Hard Drives

120-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)
	Capacity	120 GB
	Height	0.37 in (9.5 mm)
	Width	2.75 in (70 mm)
	Interface	ATA-7 / SATA 1.0a
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)
	Seek Time	Single Track 3 ms
	(typical reads, including settling)	Average 13ms Maximum 24 ms
	Rotational Speed	5400 rpm
	Logical Blocks	234,441,648
Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
Features	ATA Security	

Technical Specifications

100-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	100 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	195,371,568	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

80-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	80 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	156,301,488	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

60-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	60 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	117,231,408	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

40-GB 5400 rpm SATA	Drive Weight	0.22 lb (101 g)	
	Capacity	40 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-7 / SATA 1.0a	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	78,165,360	
	Operating Temperature	41° to 140° F (5° to 60° C) [case temp]	
	Features	ATA Security	

Storage Drives – Fixed Bay

DVD/CD-RW Combo Drive	Access Times	Random	<110 ms CD
			<130 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		24X CD-RW	3,600 KB/s
	Transfer Mode	Multiword DMA Mode 2	
	Interface	EIDE	
	Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW	
	Supported Media (write)	CD-R, CD-RW	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	700 MB	
	Transport	Tray loading	

Technical Specifications

LightScribe DVD+/-RW Drive with Double Layer	Access Times	Random	<175 ms CD <230 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		16X CD-RW	2,400 KB/s
		8X DVD+R	10,800 KB/s
		4X DVD+RW	5,400 KB/s
		8X DVD-R	10,800 KB/s
		4X DVD-RW	5,400 KB/s
		2.4X DVD+R(9)	2,700 KB/s
	Transfer Mode	Multiword DMA Mode 2	
Interface	EIDE		
Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW		
Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, LightScribe		
Max Media Capacity (read)	8.5 GB		
Max Media Capacity (write)	8.5 GB		
Transport	Tray Loading		

DVD+/-RW SuperMulti Drive with Double Layer	Access Times	Random	<175 ms CD <230 ms DVD
	Max Data Transfer Rate	24X CD-ROM	3,600 KB/s
		8X DVD	10,800 KB/s
		24X CD-R	3,600 KB/s
		16X CD-RW	2,400 KB/s
		8X DVD+R	10,800 KB/s
		4X DVD+RW	5,400 KB/s
		8X DVD-R	10,800 KB/s
		4X DVD-RW	5,400 KB/s
		2.4X DVD+R(9)	2,700 KB/s
	5X DVD-RAM	6,750 KB/s	
Transfer Mode	Multiword DMA Mode		
Interface	EIDE		
Supported Media (read)	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM		
Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM		

Technical Specifications

Max Media Capacity (read)	8.5 GB
Max Media Capacity (write)	8.5 GB
Transport	Tray Loading

Audio

Hardware	Implementation	ADI1981HD High Definition CODEC
	Full Duplex	Yes
	Sound Blaster Pro compatible	Yes
	Microphone Jack	Stereo or mono
	Headphone/Line Out Jack	Stereo

Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz– 48 kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Internal Speaker	Power Rating	2 Watts
	Impedance	4 Ohms

Communications

Technical Specifications

Integrated Broadcom 10/100 Ethernet PCI Controller (BCM4401)	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)
	Power Management	ACPI compliant -- multiple power modes Situation-sensitive features reduce power consumption
	Manageability	Wake-on-LAN from standby and hibernation (configurable; Magic Packet and Microsoft Wake-Up Frame) PXE 2.1 Remote Boot Statistics Gathering (RMON, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite
	Interface	32-bit PCI, 33-MHz
	NIC Device Driver Name	Broadcom 440X 10/100 Integrated Controller
	Drivers Available	Microsoft Windows XP Microsoft Windows 2000

V.92 56K Data/Fax Modem	Form Factor	MDC 1.5 Daughtercard
	Power Management Support	APM Revision 1.2, ACPI
	Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
	Data Mode Capabilities	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) Optional symbol rates: 2800, 3429 Asymmetric Symbol rates Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J

Technical Specifications

Fax Mode Capabilities	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
Command Set	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

Broadcom 4311AG 802.11a/b/g WiFi Adapter

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz and 5 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK)²	17.5 dBm
Output Power (for OFDM; power varies by data rate)²	15 dBm
Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode ³ : 390 mW (nominal) Sleep mode: 20 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode

Technical Specifications

Receiver Sensitivity⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment
	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility⁵	Choice of Configuration Utility: <ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants. 	

Broadcom 4311BG 802.11b/g WiFi Adapter	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM

Technical Specifications

Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM.	
	Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).	
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CKK)²	17.5 dBm	
Output Power (for OFDM; power varies by data rate)²	15 dBm	
Power Consumption	Transmit: 2.0 W (max) Receive: 1.5 W (max) Idle mode ³ : 390 mW (nominal) Sleep mode: 20 mW (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.026 lb (12 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)

Technical Specifications

Configuration Utility⁵	Choice of Configuration Utility: <ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON <ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software supplicants.

Intel PRO/Wireless 3945ABG 802.11a/b/g Network Connection	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant (details at www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz and 5 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
	Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST, EAP-SIM. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4).
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CKK)²	15 dBm
	Output Power (for OFDM; power varies by data rate)²	15 dBm
	Power Consumption	Transmit: 1.8 Watts (max) Receive: 1.4 Watts (max) Idle mode ³ : 150 mW (nominal) Sleep mode: 30 mW (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	54 Mbps: -72 dBm, 11 Mbps: -88 dBm , 1 Mbps: -97 dBm	

Technical Specifications

Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Range	802.11 a – Typical (@6 Mbps)	600 feet – Outdoor Open Area 150 feet – Indoor, Office environment
	802.11 b – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
	802.11 g – Typical (@1 Mbps)	1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
Form Factor	PCI-Express MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility⁵	Choice of Configuration Utility: <ul style="list-style-type: none"> • Microsoft Windows XP Wireless Network Connection Manager • Intel PROSet (required for Cisco Compatible Extensions support) 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. In Power Save Polling mode. 4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 5. WLAN supplier's client utility is required for Cisco Compatible Extensions support. WLAN may also be compatible with certain third-party software suppliers. 	

HP Integrated Module with Bluetooth Wireless Technology

Bluetooth Specification	2.0 Compliant
Dimensions	1.02 x 0.55 x 0.22 in (26 x 14 x 5.7 mm)
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)
Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate
Power Consumption	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
Antenna	Internally integrated within module

Technical Specifications

Range	Up 33 ft (10 m)
Electrical Interface	USB 2.0 compliant
OS Support	Microsoft Windows Plug and Play compliant Microsoft Windows XP Professional and Home Microsoft Windows 2000
Bluetooth Software Supported	Broadcom Bluetooth for Windows Microsoft Windows XP Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Temperature	Operating -4° to 158° F (-20° to 70° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% Non-operating 5% to 95%
Altitude	Operating 15,000 ft (4,572 m) Non-operating 40,000 ft (12,192 m)
Bluetooth Profiles Supported	(with Bluetooth for Windows 4.0 software) Serial Port Profile (SPP)* Dial-Up Networking (DUN)* Generic Object Exchange Profile (GOEP) Object Push Profile (OPP)* File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP)* Personal Area Networking Profile (PAN)* Human Interface Device Profile (HID)* FAX Profile (FAX) Basic Imaging Profile (BIP) Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

* indicates the profile is also supported by Microsoft Windows XP SP2

Technical Specifications

Environmental Data **Eco-Label Certifications** This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- US Federal Energy Management Program (FEMP)
- Taiwan Green Mark
- China Energy Conservation Program
- IT ECO declaration

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a "Typically Configured Notebook."

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	23.0 W	23.5 W	23.0 W
Sleep (Energy Star low power mode)	1.72 W	1.88 W	1.73 W
Off	1.90 W	1.90 W	1.98 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	78 BTU/hr	80 BTU/hr	78 BTU/hr
Sleep	5.9 BTU/hr	6.4 BTU/hr	5.9 BTU/hr
Off	6.5 BTU/hr	6.8 BTU/hr	6.5 BTU/hr

***NOTE:** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.2	23
Fixed Disk (random writes)	3.8	24

Batteries This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000 ppm by weight.

Battery type and chemistry used in the product:

- Primary battery
- 6-cell high capacity Lithium-Ion battery pack
- Real Time Clock battery
- CR2032 (coin cell), Lithium

Technical Specifications

Additional Information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

Keyboard complies with ISO standard: ISO 9995, EN 29241-4, and ISO/IEC 15412

Input devices of this product comply with ISO 9241, part 9.

Plastics parts weighing over 0.055 pounds (25 grams) used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% recycled materials (by wt.)

This product is greater than 85% recycle-able when properly disposed of at end of life.

Packaging

Packaging Materials

- External:
 - Corrugated Paper – 2.03 lb (920 g)
- Internal:
 - Corrugated Paper – 1.84 lb (835 g)
 - EPE Foam – 0.12 lb (55 g)
 - LDPE Bag – 0.01 lb (5 g)
- The corrugated paper packaging materials contains at least 80% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Technical Specifications

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment

(http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

End-of-life Management and Recycling

HP offers our customers several other options for handling their aging computers while also minimizing the impact on the environment-including product trade-in and leasing services-in addition to recycling services. Please go to: <http://www.hp.com/recycle>, or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Technical Specifications

Copyright © 2007 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows Vista, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Core Duo, Centrino, and SpeedStep are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.